KRAMP LINKAGE

THREE POINT LINKAGE DRAWBAR CAT 1

KR-TL150881

Drawbar and top link attachment with tow ball and drawbar pin options.

- Outside width:811 mm
- Inside width: 661 mm
- Total height: 525 mm
- Hook ball outside diameter: 50 mm
- Pull pin diameter: 20 mm
- Max. pulling load : 3000 kg

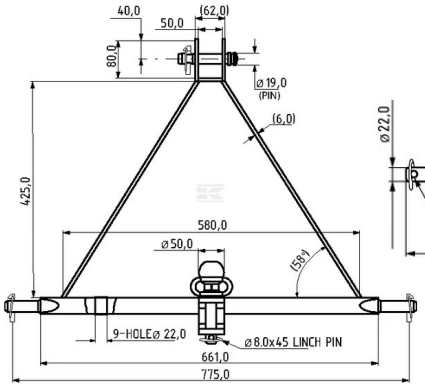

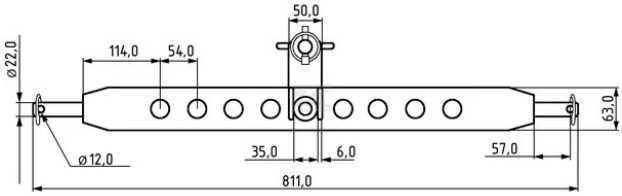

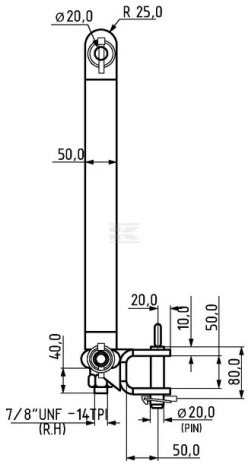

KR-TL150861

Drawbar and top link attachment with tow ball and drawbar pin options.

- Outside width: 640 mm
- Inside width: 506 mm
- Total height: 525 mm
- Hook ball outside diameter: 50 mm
- Pull pin diameter: 20 mm
- Max. pulling load: 2500 kg

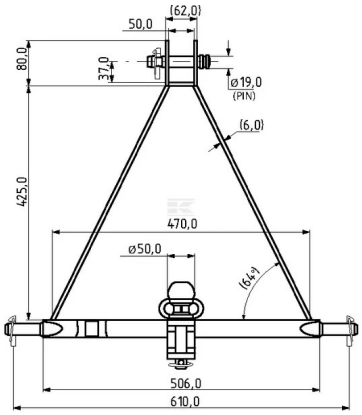

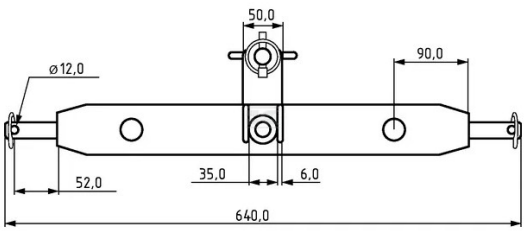

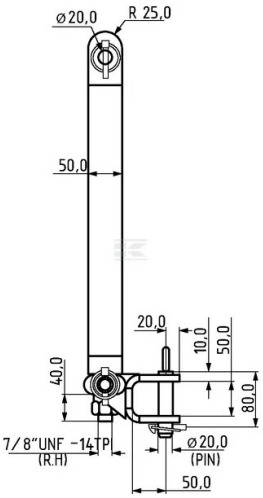

P: 1800 PFG PARTS (1800 734 727)
W: www.pfgaustralia.com.au E: parts@pfgaustralia.com.au

THREE POINT LINKAGE DRAWBAR CAT 2

KR-TL150892

**Drawbar and top link attachment with tov
ball and drawbar pin options.**

- Outside width: 977 mm
- Inside width: 812 mm
- Total height: 525 mm
- Hook ball outside diameter: 50 mm
- Pull pin diameter: 20 mm
- Max. pulling load: 3500 kg

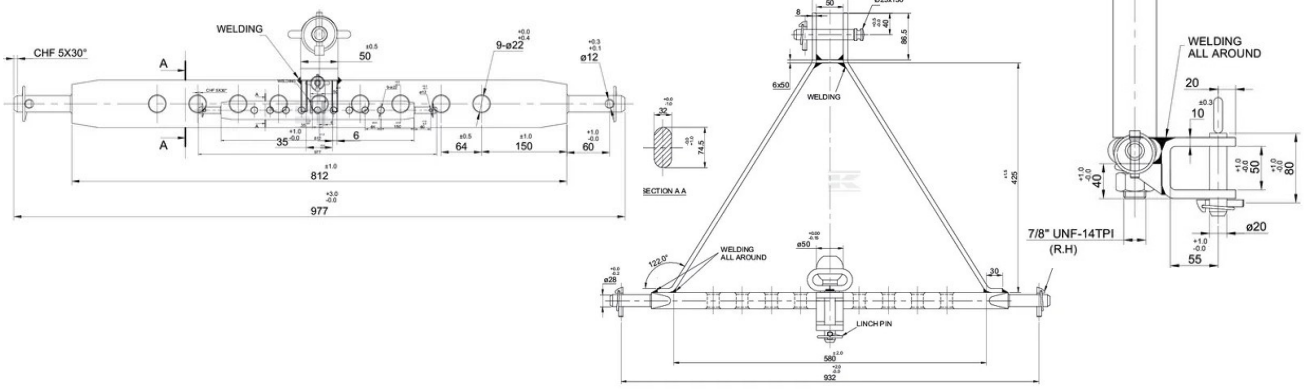

LINKAGE TRANGLES

BACKLINE LINKAGE TRAINGLE CAT 2S PREMIUM

KR-TL150679KR

- Single-person operation
- Robust design

- Application range: For the rapid coupling and uncoupling of tools
- Technical info: Refer to instruction manual before use
- Ensure that the pawl is correctly closed and secured before use
- X = inside width of lower link lift arm hoc
- H = overall height
- Benefits: User friendly secure
- Category: 2S
- X Inside width: 825 mm
- Consists of Three-point quick-release
- Coupling pins
- H Total height: 750 mm
- Max. vertical load: 1500 kg

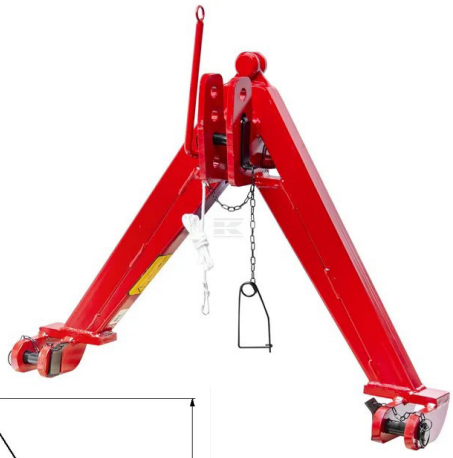

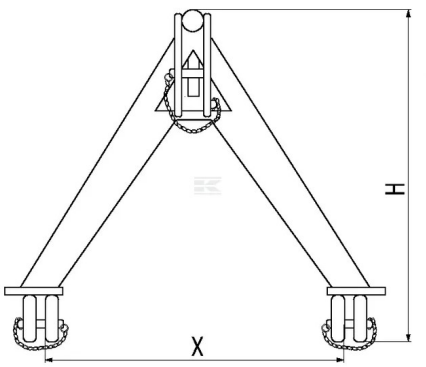

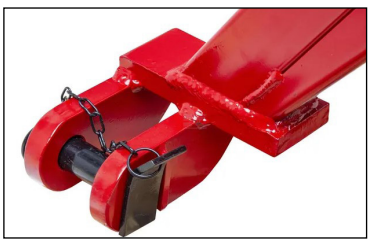

IMPLEMENT TRIANGLE CAT 0

KR-TL150781

- Application range: Suitable for any three-point couplings for equipment up to 1500 kg
- Properties: Sturdy U-bracket
- Pulling force of up to 74 kW
- Red oxide primer finish
- Category: 0
- Outside width: 660 mm
- Total height: 440 mm

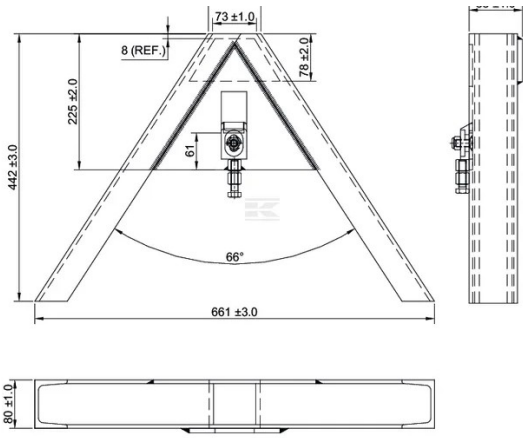

QUICK CHANGE FRAME

KR-FT2065

Equipment can be quickly and easily attached using the quick switch system. Equipment is locked in place with just one movement of a lever

- Application range: Suitable for virtually all front loaders and small wheeled loaders. Equipment with European standard mounting.
- Benefits: Saves time, Safe operation.
- Total width: 1110 mm
- B Profile thickness: 40 mm
- Pin diameter above: 30 mm
- Pin diameter under: 20 mm
- Connection type: Euro
- Extra info: Maximum load capacity : 2,000 kg

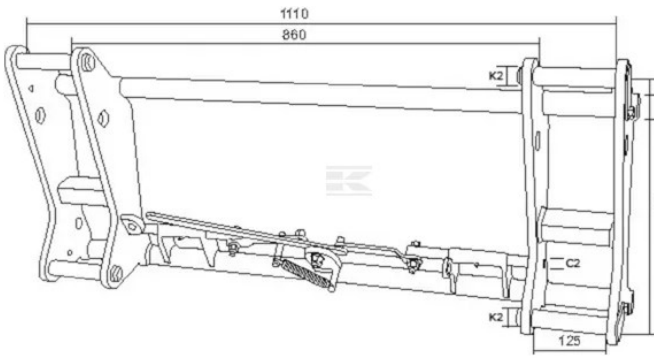

LOADER BRACKETS

COMPLETE ADAPTOR PLATE SET

KR-FT2102

Euro Hook

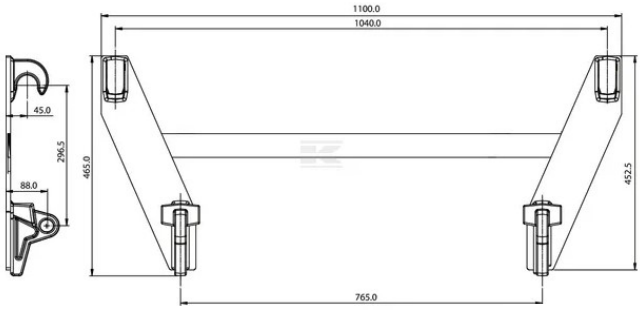

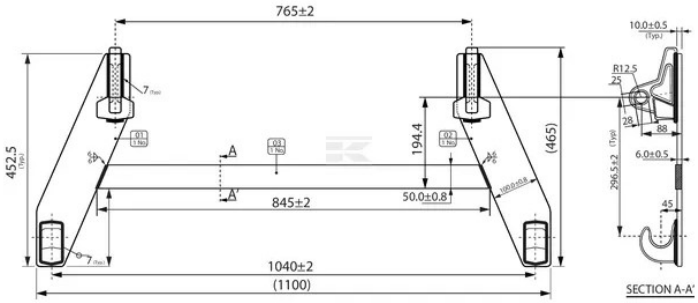

ADAPTOR PLATE SET LH/RH

KR-FT2101
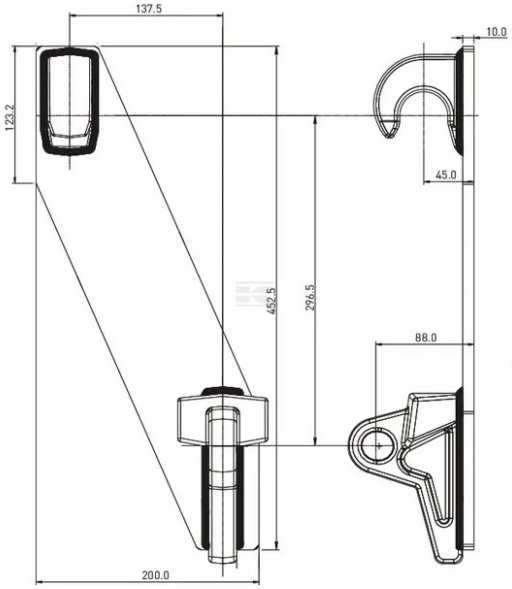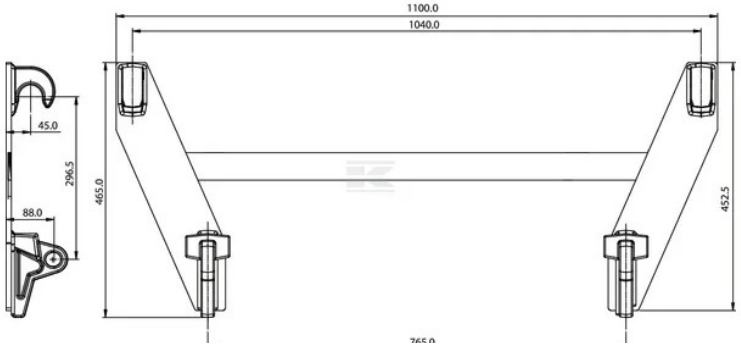
Euro Hook