AGROLUX 310 SERIES

62HP

AGROLUX 310

DEUTZ FAHR

DEUTZ-FAHR

AGROLUX 310 SERIES

FEATURES & BENEFITS

Operator Platform

The floor mat covering the footstep is padded with specialised soundproofing and thermal insulation materials to minimise noise, vibration, and heat, enhancing operator comfort while driving.

Front Brakes

Equipped with front axle brakes for safe stopping on flat or hilly terrain. 4WD braking improves safety with better traction, stability, and less brake wear.

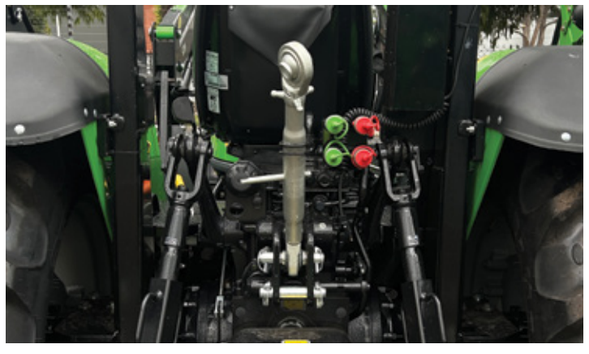

Hydraulics

The Agrolux 310 is equipped with a 42 L/min hydraulic pump plus a dedicated steering pump, ensuring consistent hydraulic flow to the steering orbital for safe and reliable steering in all working conditions.

Transmission

The Agrolux is fitted with a 3-range, 15 forward/15 reverse synchromesh transmission paired with a heavy-duty 11 inch dual dry clutch for smooth and reliable operation.

Loader

Equipped with the Agrolift 2940 CRX loader, offering a lift height of up to 2.7 metres for reliable and efficient material handling.

Engine

The dependable and robust SDF 1000 Series engine is a compact 3-cylinder unit that delivers 62HP. It is known for it's reliability and ease of maintenance.

TECHNICAL DATA & FEATURES	AGROLUX 310 ROPS
POWER + PERFORMANCE	
Engine Type	Deutz-Fahr SDF 1000 Series
Emissions	Tier 3
Cylinders / Capacity	3 Cyl / 3000 cc
Aspiration	Turbo Intercooler
Max Power - 2000/25/EC (kW/HP)	45.6/62
Max Torque (Nm)	240
Rated Engine Speed (rpm)	2350
Fuel Capacity (l)	65
DRIVE + HANDLING	
Gearbox Type and Gears	Synchronised Shuttle
Number of Gears	15/15
Clutch Type	Double Dry Heavy Duty 11"
Min Speed (km/h)	0.18
Max Speed (km/h)	40
4WD	✓
Diff Lock	Standard
Brakes (No. / Type)	4/Independent Wet Disc Brakes
Wheel Size - Rear	380/85R28
Wheel Size - Front	280/85R20
PTO Type	Mechanical Independent
Speeds - Rear	540
PTO engine speed (rpm)	1967
LIFT + FLOW	
Type	Open Centre
Flow Rate (l/min)	42 (Hyd) - 17 (Steering)
Remote Valves (Sets/Type)	2 / (1 Detent / 1 Spring)
3 Point Hitch Type	Mechanical with draft
Category	2
Hitch End Type	Ball
Max Lift Capacity - Rear (kg)	3000
COMFORT + CONVENIENCE	
2 Post ROPS	✓
Sun Canopy	Optional
Driver Seat with Mechanical Suspension	✓
Display	Analogue
Side Control Levers	✓
Semi Flat Platform	✓
Exhaust Type	Downswept
Worklights (No + Type)	2 Bonnet with High/Low Beam & 1 Rear Worklight
WEIGHTS + DIMENSIONS	
Wheelbase (mm)	2015
Length (mm)	3200
Overall Width (mm)	1820
Height (mm)	2450 (Without Canapy)
Weight (kg)	2900
Turning Radius (m)	4.4

DEALER DETAILS

Images for illustration purposes only. Specifications are accurate at the timing of printing and are subject to change without notice.